


TC970

A pared-back design, large viewing window and better home performance – this inbuilt wood fireplace was made for the minimalists.

INBUILT WOOD FIREPLACE

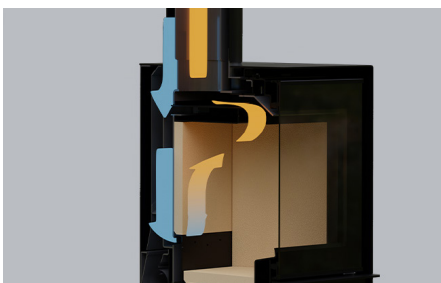

Better Home Performance

Direct Vent Flue Technology achieves greater home performance with better suitability for modern homes.



More Flame, Less Frame

The minimalist pared-back design of the firebox allows more room for logs, while the generous glass window gives you a maximised flame view.



Zero Clearance Kit

Escea provides a Zero Clearance Kit to streamline the installation process, making it as easy as possible to integrate into your home or project.

TC970

FIRE BY **escea.**

SPECIFICATIONS

MAX. HEAT OUTPUT	19 kW
EFFICIENCY	66% Clean Air
AVG. PARTICULATE EMISSION	0.93g/kg
APPLIANCE WEIGHT	150kg
FUEL TYPE	Softwood
ECAN AUTHORISATION NO.	CRC260563
FLUE TYPE	Natural Draught Direct Vent
FLUE SIZE	150mm Exhaust 200mm Intake 250mm Outer
FLUE LENGTH (MIN)	4.6m - from hearth

DIMENSIONS

APPLIANCE SIZE	1175w x 800h x 574d mm
GLASS VIEWING AREA	945w x 483h mm
FIREBOX VOLUME	102L
FLOOR PROTECTOR	Required - 1377w x 300d mm
MIN. CEILING HEIGHT FROM APPLIANCE	1155mm

INSTALLATION

Installation Height


The TC970 should sit on a continuous base, made from either combustible or non-combustible material, elevated 375mm above a combustible floor. At this height, only a continuous, non-combustible floor protector is required. Lowering the fireplace will require an insulating hearth.

Fireplace Finishing


The TC970 has a 45mm wide fascia overlapping the non-combustible wall lining.

Flue System

This fireplace uses a Direct Vent Triple Skin Flue system, taking no air from inside the building for combustion. Flue offsets are available for vertical flue path changes in direction.

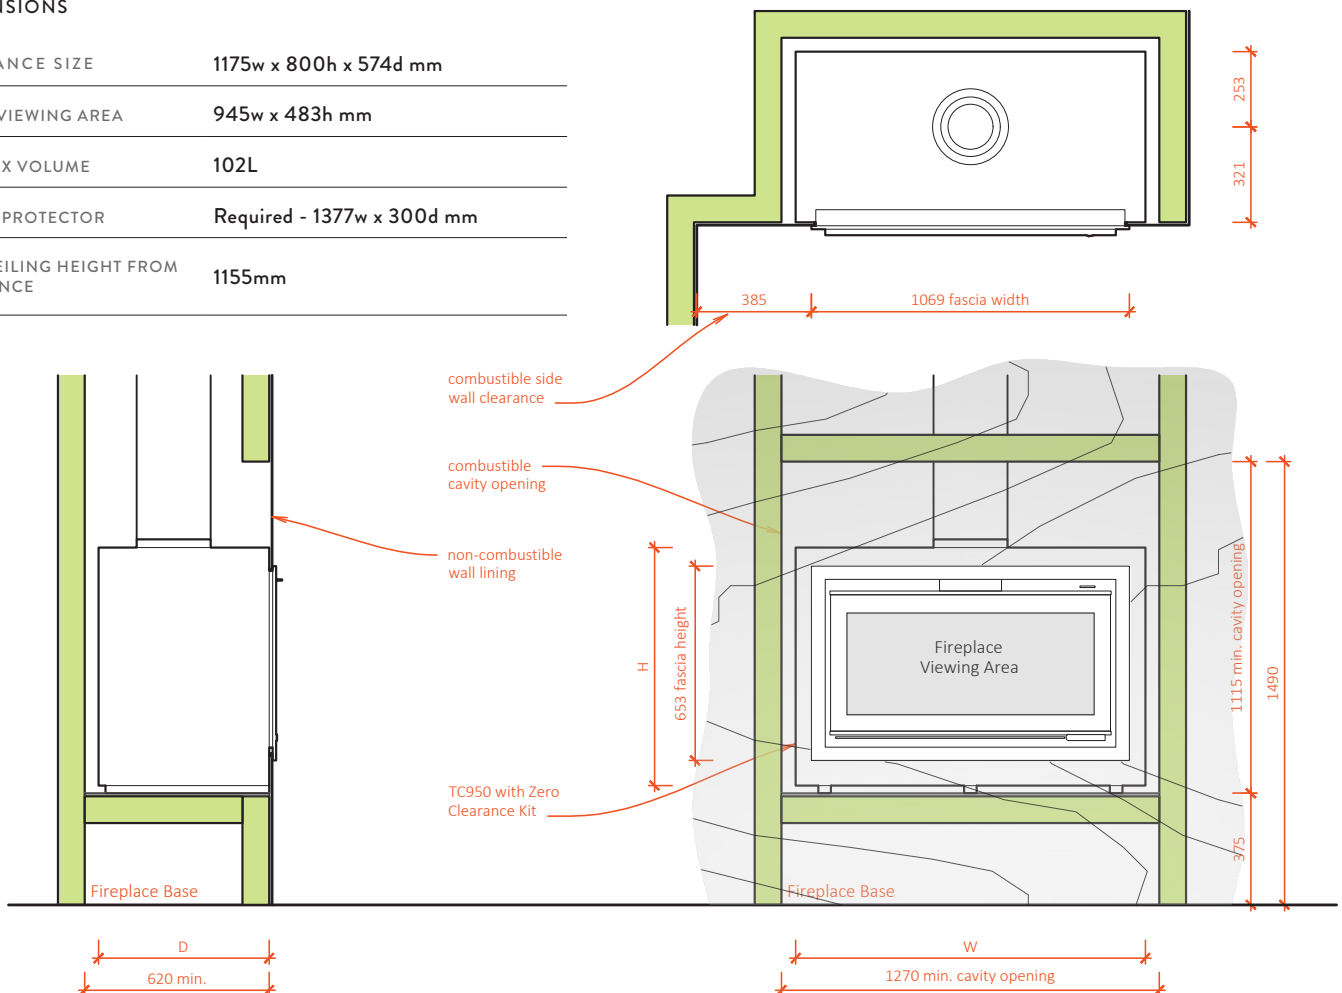

TC SERIES - ALL MODELS



TC970

Further information and technical documents available via the QR code or escea.com/tc970

