

TFS1000

This contemporary linear fireplace is a born hero, featuring an expansive viewing window, sleek clean lines, and better home performance.

FREESTANDING WOOD FIREPLACE



Better Home Performance

Direct Vent Flue Technology achieves greater home performance with better suitability for modern homes.



Generous Window

The minimalist design of the firebox allows more room for logs, while the generous glass window gives you a maximised flame view.



Your Base, Your Way

Elevate this fireplace with an Escea Concrete Plinth or Steel Base, or place it on your own custom base design.

TFS1000


FIRE BY **escea.**

SPECIFICATIONS

MAX. HEAT OUTPUT	19 kW
EFFICIENCY	66% Clean Air
AVG. PARTICULATE EMISSION	0.79g/kg
APPLIANCE WEIGHT	215kg
FUEL TYPE	Softwood
ECAN AUTHORISATION NO.	CRC253737
FLUE TYPE	Natural Draught Direct Vent
FLUE SIZE	150mm Exhaust 200mm Intake 250mm
FLUE LENGTH (MIN)	4.6m - from hearth

DIMENSIONS

APPLIANCE SIZE	998w x 632h x 526d mm
GLASS VIEWING AREA	945w x 483h mm
FIREBOX VOLUME	102L
FLOOR PROTECTOR	Required - 1220w x 926d mm
MIN. CEILING HEIGHT FROM APPLIANCE	1410mm

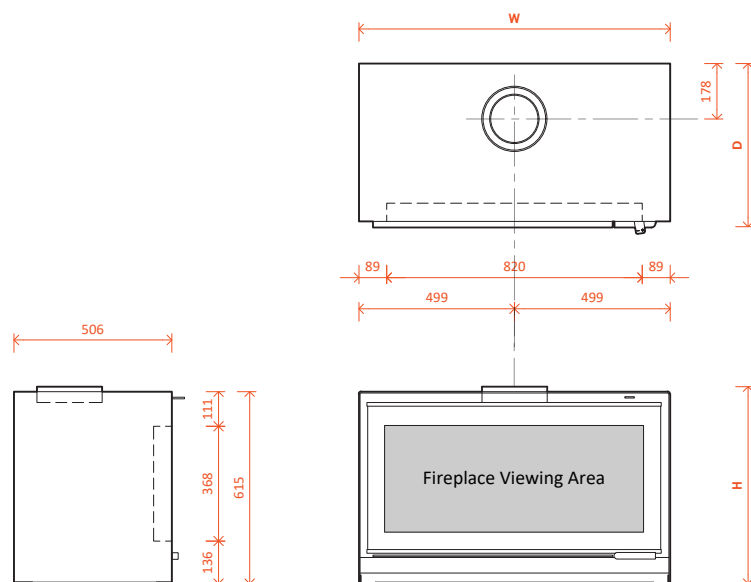

INSTALLATION

Base Requirements

Designed to be installed on an Escea Plinth or Base, or a custom designed base solution.


Installation Height

Elevate the fireplace base 375mm above a combustible floor. At this height, only a continuous, non-combustible floor protector is required. Lowering the fireplace will require an insulating hearth.


Flue System

This fireplace uses a Direct Vent Flue system, taking no air from inside the building for combustion. Flue offsets are available for vertical flue path changes in direction.


PARALLEL INSTALLATION

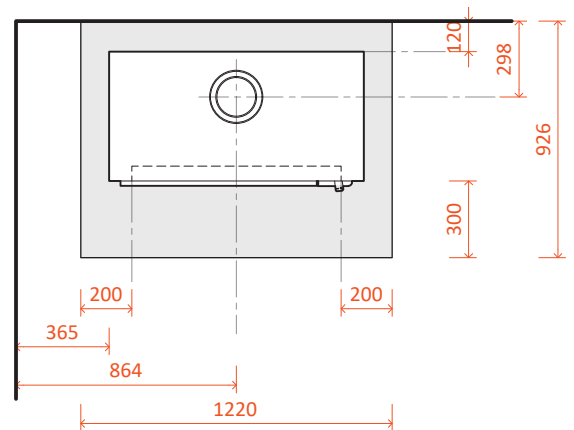

ALCOVE INSTALLATION

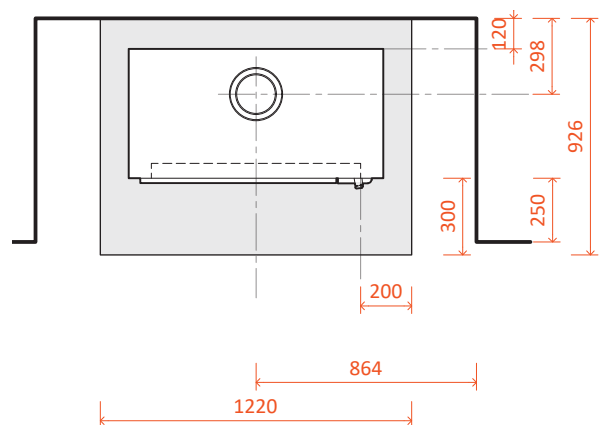

TFS SERIES - ALL MODELS

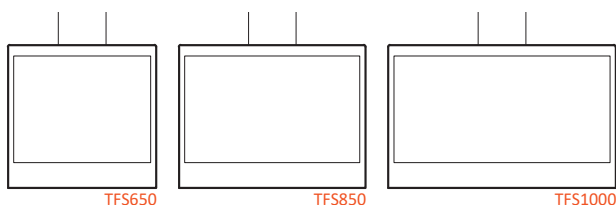

Further information and technical documents available via the QR code or escea.com/tfs-series

