


Prolonged unprotected exposure to heat may be detrimental to the appearance or long term performance of heat sensitive linings and finishes. Ensure that any heat sensitive materials are not exposed to direct heat from the fireplace viewing area.

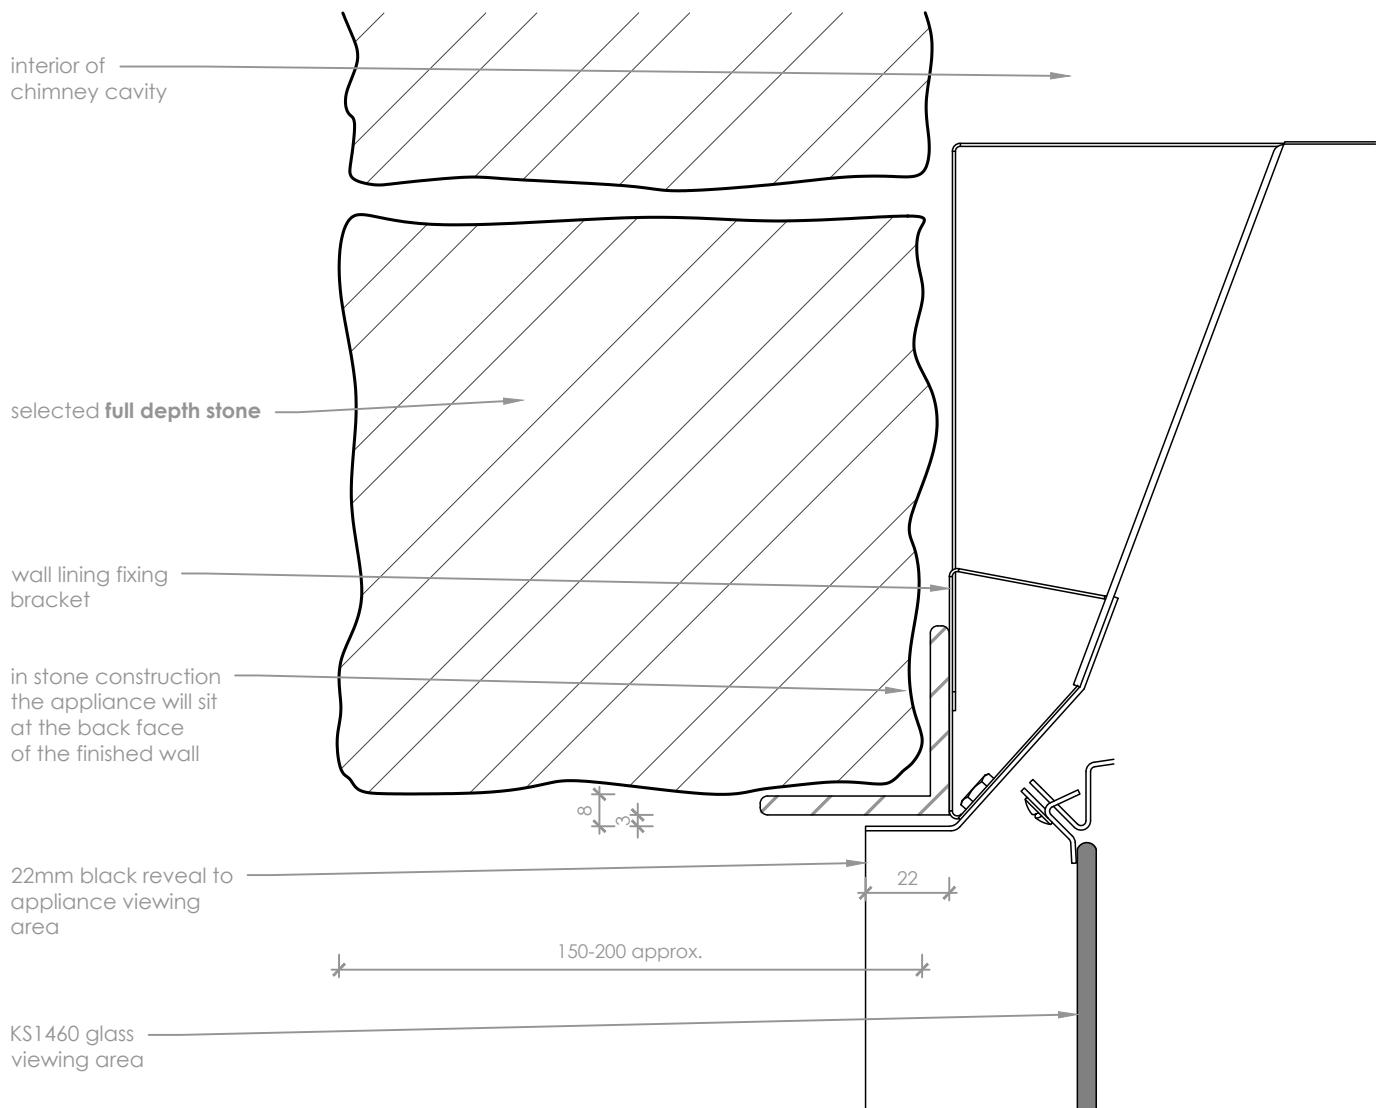

Stacked Stone Detail

scale 1:2

Notes:

- All dimensions are in mm. DO NOT SCALE OFF THESE DRAWINGS
- This detail is to assist in the installation of an indoor, frameless finish to a **Mode KS1460 Single or Double Sided Gas Fire.**
- Use care at installation to avoid damaging powdercoated black fireplace reveals - protect fire from damage and use a damp sponge to remove excess adhesive or concrete.
- Black fireplace reveals must be able to be removed - ensure any adhesive or mortar is kept clear.
- Allow for construction tolerance when setting out the opening within the precast/in-situ concrete wall.
- This technical sheet must be read in conjunction with the Mode KS1460 Installation Manual, the latest version can be found on our website at www.stokefires.com

GENERAL CONSTRUCTION AND FINISHES SHOWN INDICATIVE ONLY

Contact the ESCEA Architectural Advisory Team for assistance with the specification of this fire - aa@escea.com