


Prolonged unprotected exposure to heat may be detrimental to the appearance or long term performance of heat sensitive linings and finishes. Ensure that any heat sensitive materials are not exposed to direct heat from the fireplace viewing area.

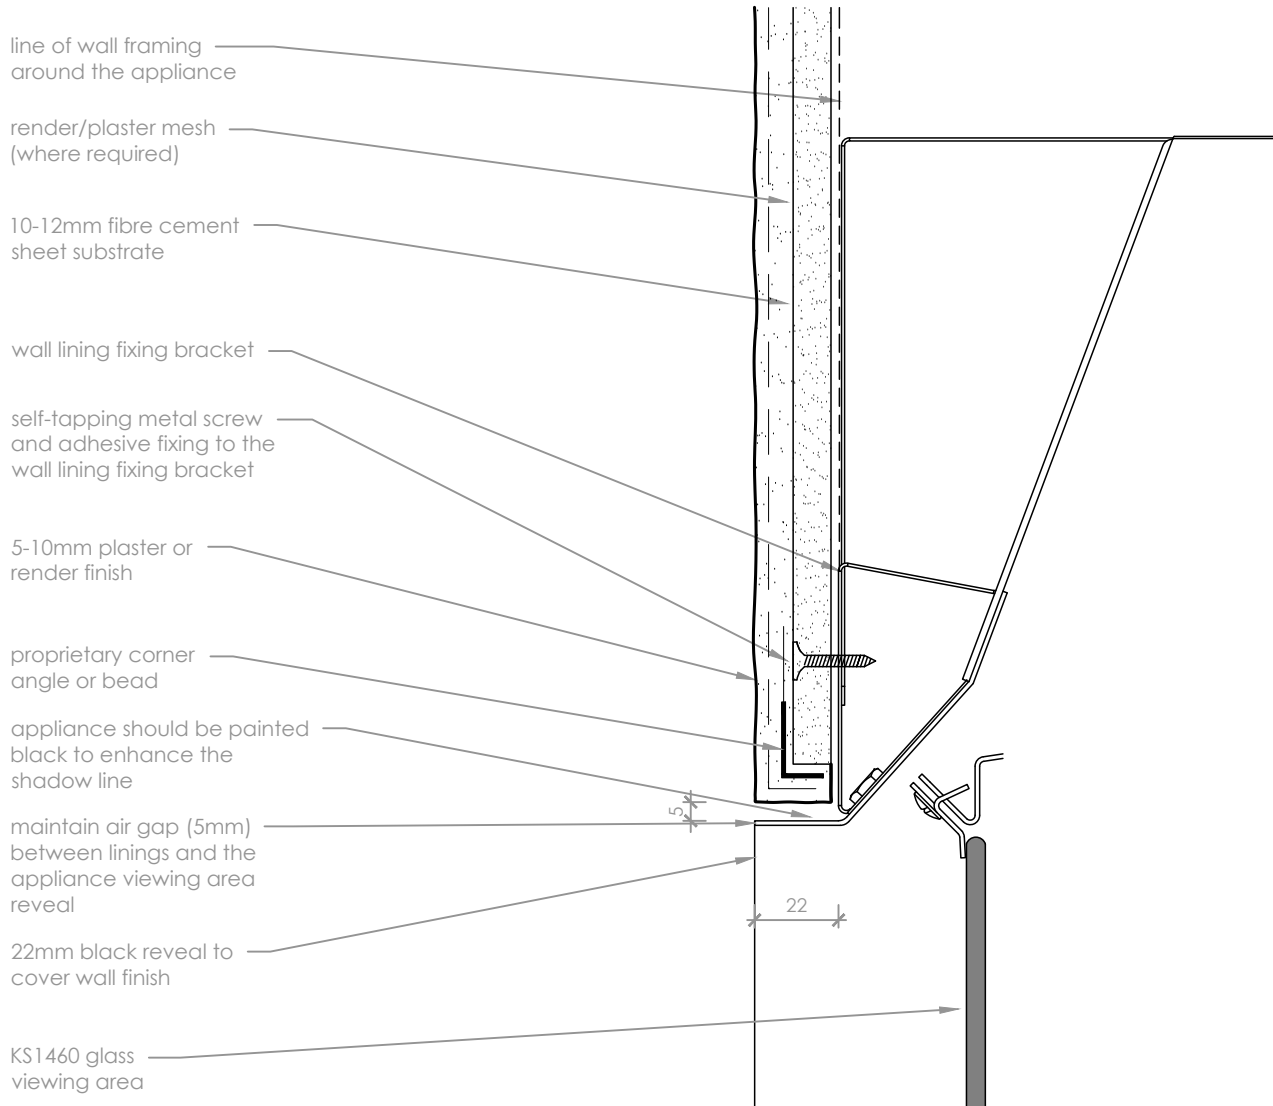

Plaster/Render Finish

scale 1:2

Notes:

- All dimensions are in mm. DO NOT SCALE OFF THESE DRAWINGS
- This detail is to assist in the installation of an indoor, frameless finish to a **Mode KS1460 Single or Double Sided Gas Fire** for Plaster or Render Finishes.
- Black fireplace reveals must be able to be removed - ensure adhesive or plaster is kept clear.
- Escea recommends when using these finishing methods that a 10mm or deeper substrate is used.
- Do not excessively push substrate board when fixing it to the appliance chassis - use daubs of adhesive to the appliance chassis, and fix substrate to ensure a flush finish with edge of the appliance reveal, when the plaster is applied.
- This technical sheet must be read in conjunction with the Mode KS1460 Installation Manual, the latest version can be found on our website at www.stokefires.com

GENERAL CONSTRUCTION AND FINISHES SHOWN INDICATIVE ONLY

Contact the ESCEA Architectural Advisory Team for assistance with the specification of this fire - aa@escea.com